

PREPARED	PIPE AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	PAGE _____
CHECKED		
APPROVED		

AIRPLANE FLIGHT MANUAL

MODEL PA-28-140

FAA IDENTIFICATION NO. N7290J

SERIAL NO. 28-24642

THIS DOCUMENT MUST BE KEPT IN AIRPLANE AT ALL TIMES.

FAA APPROVED: *H. E. Waterman*  
H. E. Waterman  
Supervisor, EMDO 42  
FAA Southern Region  
Atlanta, Georgia

DATE: February 14, 1964

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Airplane Flight Manual Model PA-28-140
CHECKED		
APPROVED		PAGE <u>II</u>





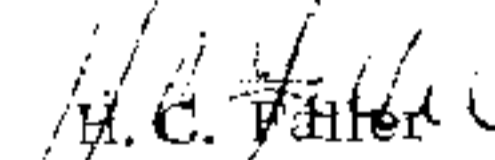
### Log of Revisions

REVISION NO.	PAGE	DESCRIPTION	APPROVED	DATE
1	1	Deleted Propeller - And Static RPM - Information	<i>H. E. Waterman</i> H. E. Waterman Supervisor SO-EMDO-42	3/24/64
2	1	Added Static R.P.M. Information	<i>H. E. Waterman</i> H. E. Waterman Supervisor SO-EMDO-42	5/25/64
3	3	Placards Section: Added Placard No. 4	<i>H. E. Waterman</i> H. E. Waterman Supervisor SO-EMDO-42	7/8/64
4	2	Maneuvers Section: Deleted Stalls in Utility Category	<i>H. C. Faller</i> H. C. Faller Supervisor SO-EMDO-43	8/31/64
5c	2,3	Increased Gross Weight to 2150 and Baggage Capacity to 200 lbs.	<i>H. C. Faller</i> H. C. Faller Supervisor SO-EMDO-43	5/21/65
6	1	Limitations Section: Revised Oil Temperature and Fuel Pressure Range	<i>Robert E. Luce</i> for H. C. Faller Supervisor, SO-EMDO-43	6/23/65
7	1	Static RPM Corrected	<i>Robert E. Luce</i> for H. C. Faller Supervisor SO-EMDO-43	8/12/65
8	1	Revised Static RPM, Oil Temperature and Fuel Pressure Limitations	<i>H. T. Herald</i> for H. C. Faller Supervisor SO-EMDO-43	12/13/65
	2	Added Note to Maximum Weight Callout		
	3	Revised Placard No. 4		

FAA APPROVED 2/14/64

PREPARED	<b>PIPER AIRCRAFT CORP.</b> DEVELOPMENT CENTER, VERO BEACH, FLA.	Airplane Flight Manual Model PA 28-140
CHECKED		
APPROVED		PAGE <u>III</u>

Log of Revisions
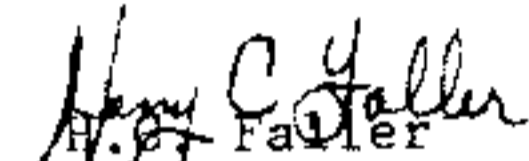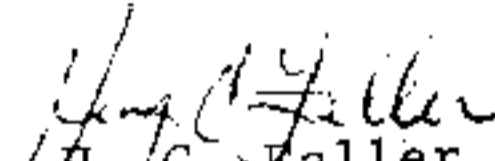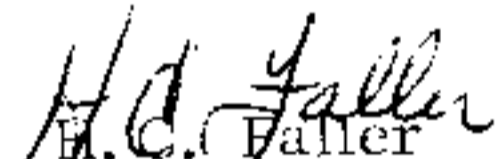
<u>REVISION NO.</u>	<u>PAGE</u>	<u>DESCRIPTION</u>	<u>APPROVED</u>	<u>DATE</u>
9	3	Procedure Section. Added Item No. 4 "Electric Pitch Trim Procedures"		
	4	Added Page 4	 H. C. Faller Supervisor SO-EMDO-43	3/16/66
10	4	Add Procedures Section And Item 5		
	3	Added Placard No. 5	 H. C. Faller Supervisor SO-EMDO-43	5/20/66
11	3	Added Placard No. 6	 H. C. Faller Supervisor SO-EMDO-43	12/16/66
12	2	Revised C. G. Range		
			 H. C. Faller Supervisor SO-EMDO-43	9/25/67
13	Title Page	Added FAA Identification No., Serial No. and this document must be kept in airplane at all times.	 H. C. Faller Supervisor SO-EMDO-43	11/27/67

FAA APPROVED 2/14/64

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Airplane Flight Manual Model PA-28-140
CHECKED		
APPROVED		PAGE 1 of 4

Piper Model PA-28-140  
Normal and Utility Categories

FAA Identification No. N7290J

Serial No. 28-24642

AIRPLANE FLIGHT MANUAL

1. Limitations Section The following limitations must be observed in the operation on this airplane:

Engine Lycoming O-320-E2A  
 Engine Limits For all operations 2700 rpm, 150 hp  
 Fuel 80/87 Octane Aviation Fuel  
 Propeller Sensenich M74DM, Maximum diameter 74 inches. Minimum diameter 72-1/2 inches. Static RPM at maximum permissible throttle setting:

2150 - 2425 for maximum allowable weight of 1950 lbs  
 2275 - 2425 for maximum allowable weight of 2150 lbs

No additional tolerance permitted.

Power Instruments Oil temperature: GREEN arc (normal operating range) 120° F to 245° F; YELLOW arc (caution range) 60° F to 120° F; RED line (maximum) 245° F (S/N 20,000 to 20,550)

Oil temperature: GREEN arc (normal operating range) 75° F to 245° F; RED line (maximum) 245° F (S/N 20,551 and up)

Oil pressure: GREEN arc (normal operating range) 60 psi to 85 psi; YELLOW arc (caution range) 25 psi to 60 psi; RED line (minimum) 60 psi; RED line (maximum) 85 psi.

Fuel Pressure: GREEN arc (normal operating range) .5 psi to 5 psi; RED line (minimum) .5 psi; RED line (maximum) 5 psi (S/N 20,000 to 20,550).

Fuel Pressure: GREEN arc (normal operating range) .5 psi to 8 psi; RED line (minimum) .5 psi; RED line (maximum) 8 psi (S/N 20,551 and up).

Tachometer: GREEN arc (normal operating range) 500 to 2700 rpm; RED line (maximum continuous power) 2700 rpm.

Airspeed Limits	Never exceed . . . . .	171
(Calibrated Airspeed)	Maximum structural cruise . . . . .	140
(Miles per Hour)	Maneuvering . . . . .	129
	Flaps extended . . . . .	115
	Maximum positive load factor . . . . .	3.8 Normal Category
	Maximum positive load factor . . . . .	4.4 Utility Category
	Maximum negative load factor . . . . .	No inverted maneuvers approved.

FAA APPROVED 2/14/64

REVISED 12/13/65 Rev. No. 8

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Airplane Flight Manual Model PA-28-140
CHECKED		
APPROVED		PAGE 2 of 4

Maximum Weight 2150 Lbs. (See Limitations Section for Static RPM Limits).  
 Baggage Capacity 200 Lbs.  
 C.G. Range The datum used is 78.4 inches ahead of the wing leading edge at the intersection of the straight and tapered section.

1. Normal Category

Weight (Pounds)	Forward Limit (In. aft of datum)	Rearward Limit (In. aft of datum)
2150	88.4	95.9
1975	85.9	95.9
1650	84.0	95.9

2. Utility Category

Weight (Pounds)	Forward Limit (In. aft of datum)	Rearward Limit (In. aft of datum)
1950	85.8	86.5
1650	84.0	86.5

Straight line variation between given points.

NOTE: It is the responsibility of the airplane owner and/or the pilot to insure that the airplane is properly loaded. See weight and balance section for loading information.

Maneuvers

- Normal Category - All acrobatic maneuvers including spins prohibited.
- Utility Category - Approved maneuvers for Utility Category only.

	<u>Entry Speed</u>
Spins (Flaps Up).....	Stall
Steep Turns.....	129 mph
Lazy Eights.....	129
Chandelles.....	129

Placards

- On the instrument panel in full view of the pilot:  
 "THIS AIRPLANE MUST BE OPERATED AS A NORMAL OR UTILITY CATEGORY AIRPLANE IN COMPLIANCE WITH THE OPERATING LIMITATIONS STATED IN THE FORM OF PLACARDS, MARKINGS AND MANUALS.  
  
 ALL MARKINGS AND PLACARDS ON THIS AIRPLANE APPLY TO ITS OPERATION AS A UTILITY CATEGORY AIRPLANE. FOR NORMAL AND UTILITY CATEGORY OPERATIONS, REFER TO THE AIRPLANE FLIGHT MANUAL."

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Airplane Flight Manual Model PA-28-140
CHECKED		
APPROVED		PAGE 3 of 4

Placards (Cont'd)

FOR SPIN RECOVERY, USE FULL RUDDER AGAINST SPIN, FOLLOWED IMMEDIATELY BY FORWARD WHEEL.

NO ACROBATIC MANEUVERS (INCLUDING SPINS) ARE APPROVED FOR NORMAL CATEGORY OPERATIONS."

2. Adjacent to upper door latch: "ENGAGE LATCH BEFORE FLIGHT."
3. On aft side of baggage compartment: "UTILITY CATEGORY OPERATION - NO BAGGAGE OR AFT PASSENGERS ALLOWED. NORMAL CATEGORY OPERATION - SEE AIRPLANE FLIGHT MANUAL WEIGHT AND BALANCE SECTION FOR BAGGAGE AND AFT PASSENGER LIMITATIONS."
4. On the instrument panel in full view of the pilot when the oil cooler winterization kit is installed: "OIL COOLER WINTERIZATION PLATE TO BE REMOVED WHEN AMBIENT TEMPERATURE EXCEEDS 50° F."
5. On the instrument panel in full view of the pilot when the autoflite is installed: "FOR HEADING CHANGES: PRESS DISENGAGE SWITCH ON CONTROL WHEEL. CHANGE HEADING. RELEASE DISENGAGE SWITCH."
6. On the instrument panel in full view of the pilot:

Utility Category Only

Acrobatic maneuvers are limited to the following:

	<u>Entry Speed</u>
Spins (Flaps up).....	Stall
Steep turns.....	129 mph
Lazy eights.....	129
Chandelles.....	129

Airspeed Instrument Markings

RED radial line	Never Exceed	171 mph (148 knots)
YELLOW arc	Caution Range (Smooth Air Only)	140 to 171 mph (121 to 148 knots)
GREEN arc	Normal Operating Range	64 to 140 mph (56 to 121 knots)
WHITE arc	Flaps Down Range	55 to 115 mph (48 to 100 knots)

**WARNING**

The rudder pedals are suspended from a torque tube which extends across the fuselage. The pilot should become familiar with the proper positioning of his feet on the rudder pedals so as to avoid interference with the torque tube when moving the rudder pedals or operating the toe brakes.

FAA APPROVED 2/14/64

REVISED 12/6/66 Rev. No. 11

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Airplane Flight Manual Model PA-28-140
CHECKED		
APPROVED		PAGE 4 of 4

2. Procedures Section

1. The stall warning system is inoperative with the master switch off.
2. The electric fuel pump must be on for both takeoff and landing.
3. Except as noted above, all operating procedures for this airplane are normal.
4. (Electric Pitch Trim Installation Only)  
The following emergency information applies in case of electric pitch trim malfunction:
  - a. In case of malfunction, disengage electric pitch trim by pulling out circuit breaker on instrument panel.
  - b. In emergency, electric pitch trim may be overpowered using manual pitch trim.
  - c. In cruise configuration, malfunction results in 10° pitch change and 30 Ft. altitude variation.
5. (Autoflite Installation Only)  
The following emergency information applies in case of autoflite malfunction:
  - a. In case of malfunction PRESS disconnect switch on pilot's control wheel.
  - b. Rocker switch on instrument panel - OFF.
  - c. Unit may be overpowered manually.
  - d. In cruise configuration malfunction, 3 seconds delay results in 60° bank, and 100' altitude loss.
  - e. In approach configuration malfunction, 1 second delay results in 10° bank and 0' altitude loss.

3. Performance Section

All performance is given for a weight of 2150 pounds.

Loss of altitude during stalls can be as great as 200 feet, depending on configuration and power.

Stalling speeds, in MPH, power off, versus angle of bank (Calibrated Airspeed):

Angle of Bank	0	20	40	50	60
Flaps Up	64	66	73	80	91
Flaps Down	55	--	--	--	--

FAA APPROVED 2/14/64

REVISED 5/20/66

Rev. No. 10

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED		PAGE 1 Section 1

WEIGHT AND BALANCE DATA  
MODEL PA-28-140 CHEROKEE

Airplane Serial Number 28 - 24642

Registration Number N7290J

Date JUN 4 1978

AIRPLANE EMPTY WEIGHT

Item	Weight (lbs)	X C.G. Arm (Inches Aft of Datum)	= Moment (In-lbs)
<del>XXXXXX</del> Standard Empty Weight * Computed	1204.0	84.7	101930
Optional Equipment	80.6	88.1	7102
Unusable Fuel (3 Pints)	2.2	103.0	227
Licensed Empty Weight = Total of Above Items	1286.8	84.9	109259

\* Standard Empty Weight includes paint, hydraulic fluid and undrainable engine oil.

AIRPLANE USEFUL LOAD

(Gross Weight) - (Licensed Empty Weight) = Useful Load

Normal Category: (2150 lbs) - (1286.8 lbs) = 863.2 lbs.

Utility Category: (1950 lbs) - (1286.8 lbs) = 663.2 lbs.

THIS LICENSED EMPTY WEIGHT, C. G. AND USEFUL LOAD ARE FOR THE AIRPLANE AS DELIVERED FROM THE FACTORY. REFER TO FORM FAA-337 WHEN ALTERATIONS HAVE BEEN MADE.

A. Grenier  
Inspection Representative



PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED		PAGE 2 Section 1

C.G. RANGE AND WEIGHT INSTRUCTIONS

1. Add the weight of all items to be loaded to the licensed empty weight.
2. Use the loading graph to determine the moment of all items to be carried in the airplane.
3. Add the moment of all items to be loaded to the licensed empty weight moment.
4. Divide the total moment by the total weight to determine the C.G. location.
5. By using the figures of Item 1 and Item 4, locate a point on the C.G. range and weight graph. If the point falls within the C.G. envelope, the loading meets the weight and balance requirements.

NOTE: With optional jump seats installed, aft passenger weight is restricted only by airplane weight and balance limitations (See Page 4 of this section.) Baggage capacity is limited to 200 pounds by tiedown requirements.

SAMPLE LOADING PROBLEM (Normal Category)

	Weight (lbs)	Arm Aft Datum (Inches)	Moment (In-Lbs)
Licensed Empty Weight	<del>1286.8</del> 1369.4	<del>84.9</del> 94.1	<del>109259</del> 129540
Oil (8 quarts)	15	32.5	488
Pilot and Front Passenger	340	85.5	29070
Passengers, Aft *	340	117.0	39780
Fuel (50 Gal. Maximum) 28.0 gal.	168.2	95.0	15979
Baggage *		117.0	
Total Loaded Airplane	<del>2150</del> 2150	90.5	194576


The center of gravity (C.G.) of this sample loading problem is at 90.5 inches aft of the datum line. Locate this point (90.5) on the C.G. range and weight graph. Since this point falls within the weight - C.G. envelope, this loading meets the weight and balance requirements.

IT IS THE RESPONSIBILITY OF THE PILOT AND AIRCRAFT OWNER TO INSURE THAT THE AIRPLANE IS LOADED PROPERLY.

\* Utility Category Operation - No baggage or aft passengers allowed.


PREPARED	<b>PIPER AIRCRAFT CORP.</b> DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED		PAGE <u>3</u> Section <u>1</u>

LOADING GRAPH

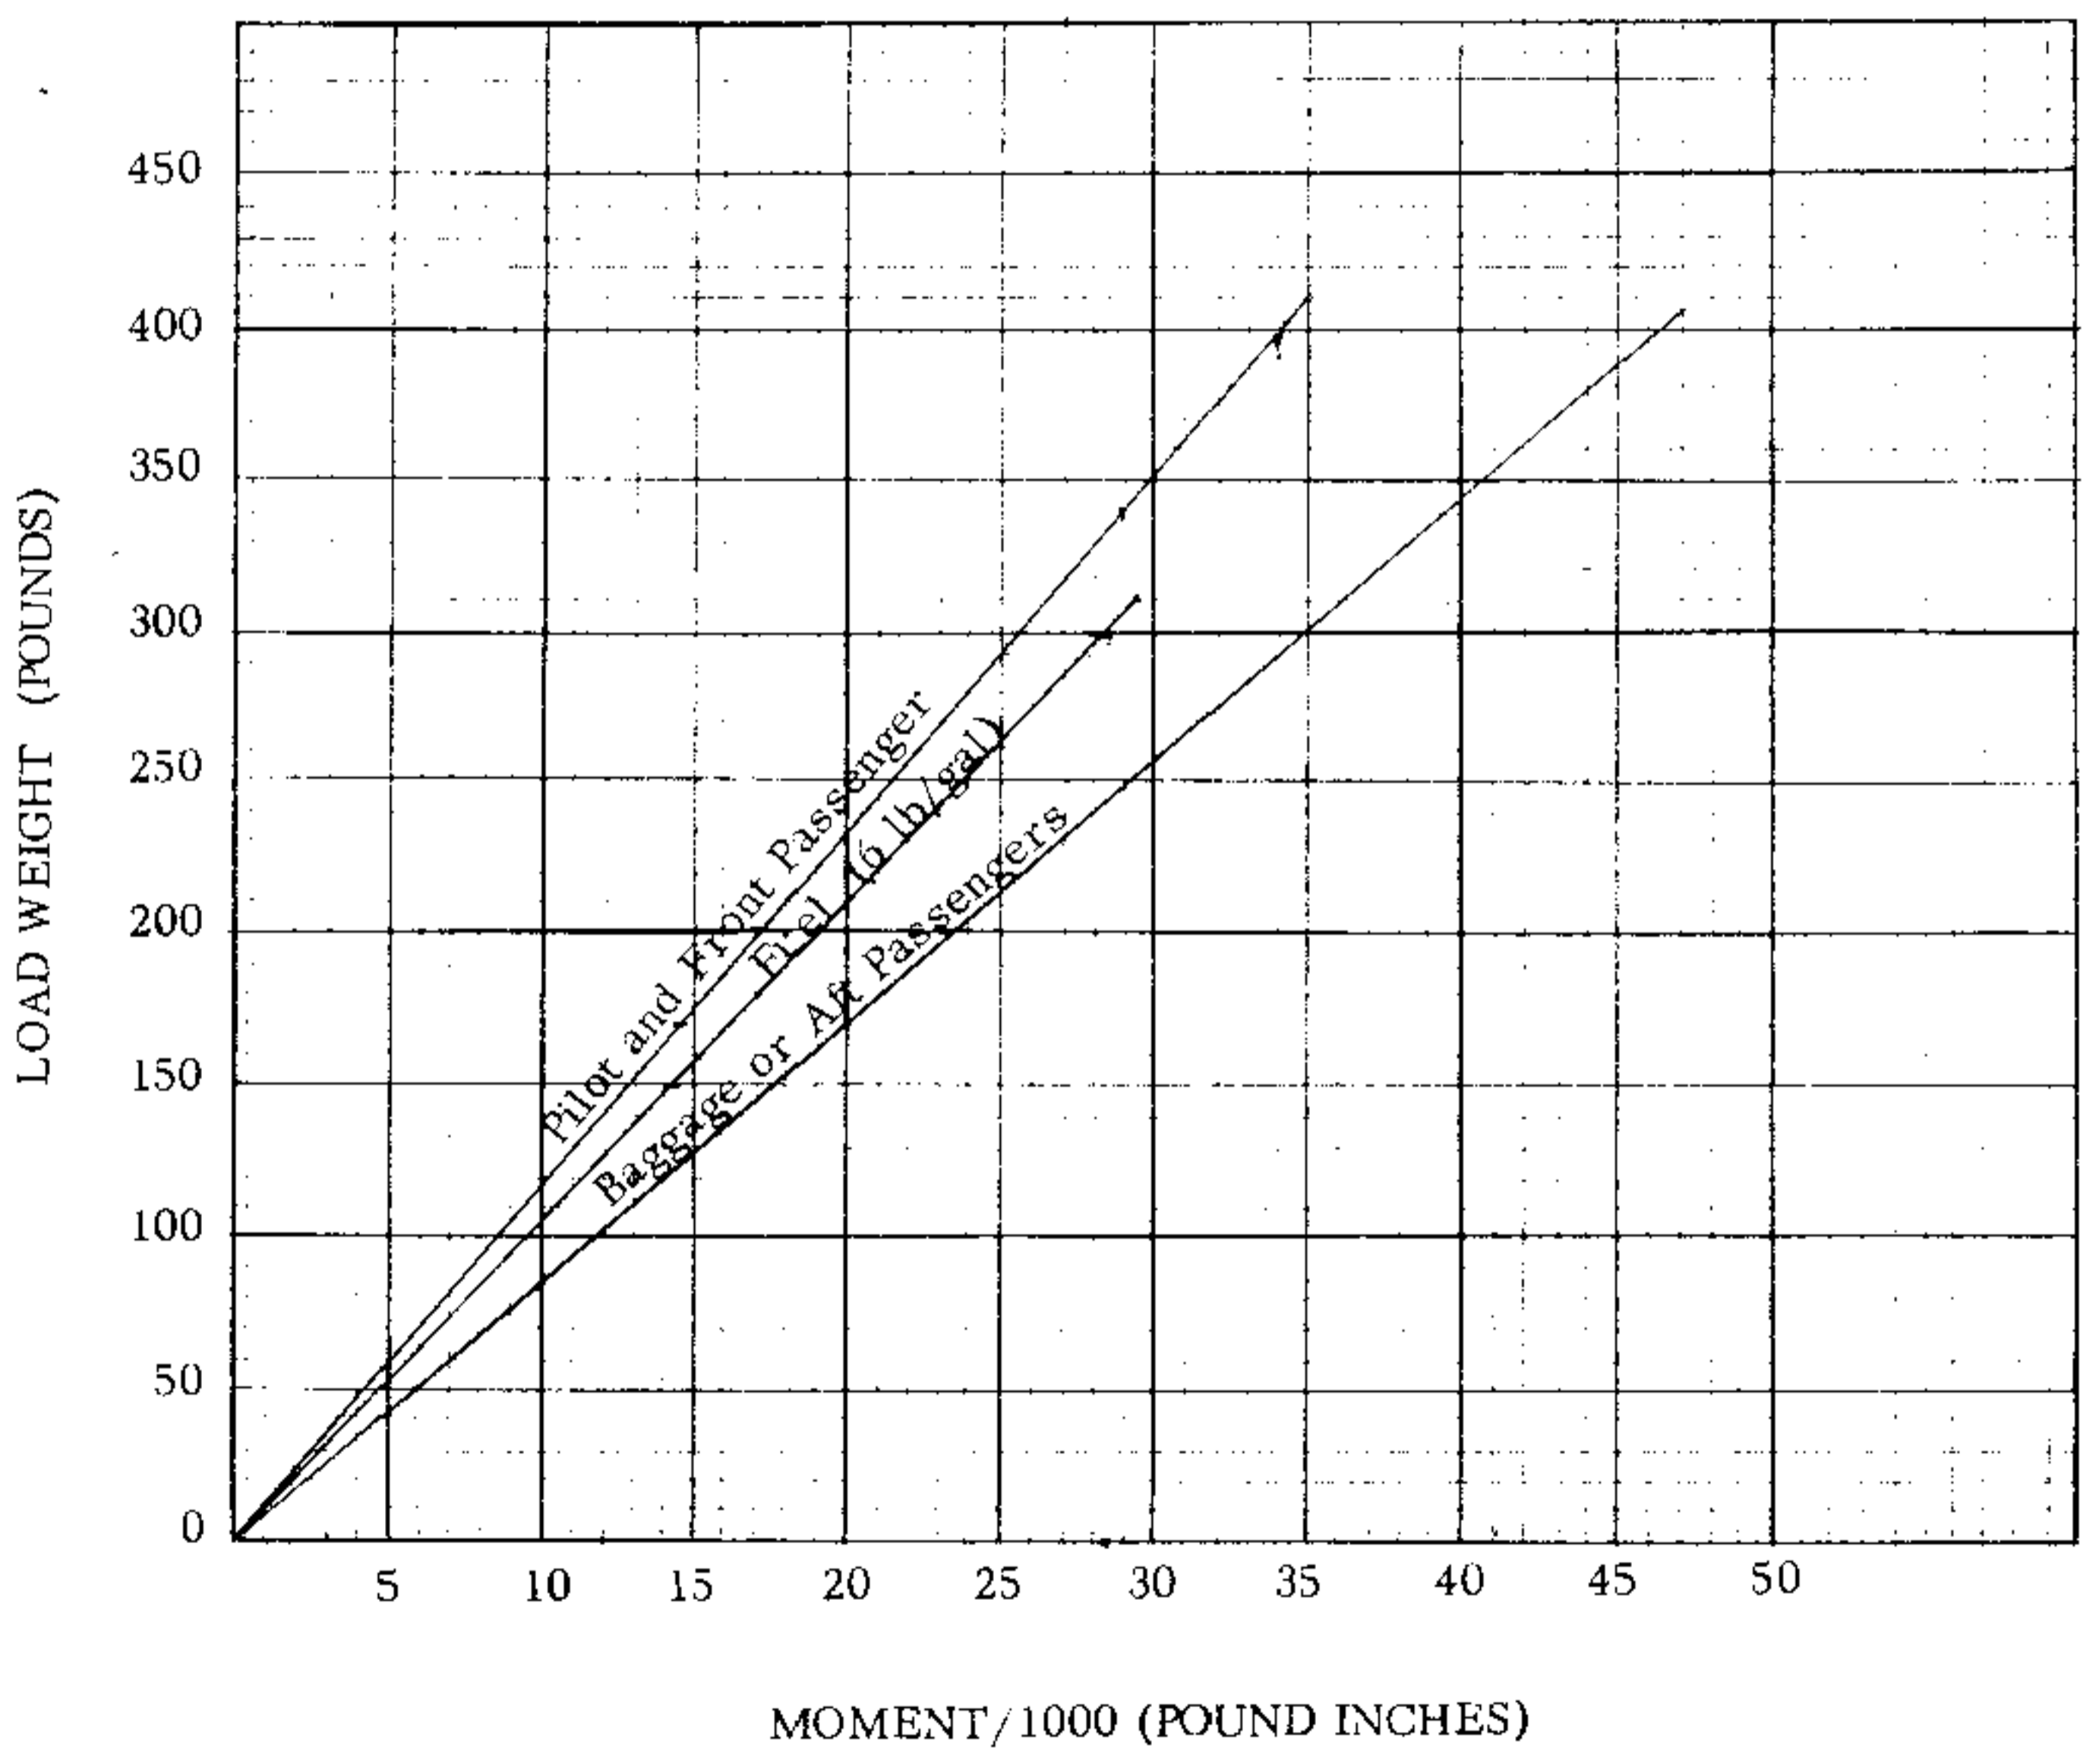

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight & Balance Data Model PA 28-140
CHECKED		
APPROVED		PAGE 4 Section 1

C.G. RANGE AND WEIGHT

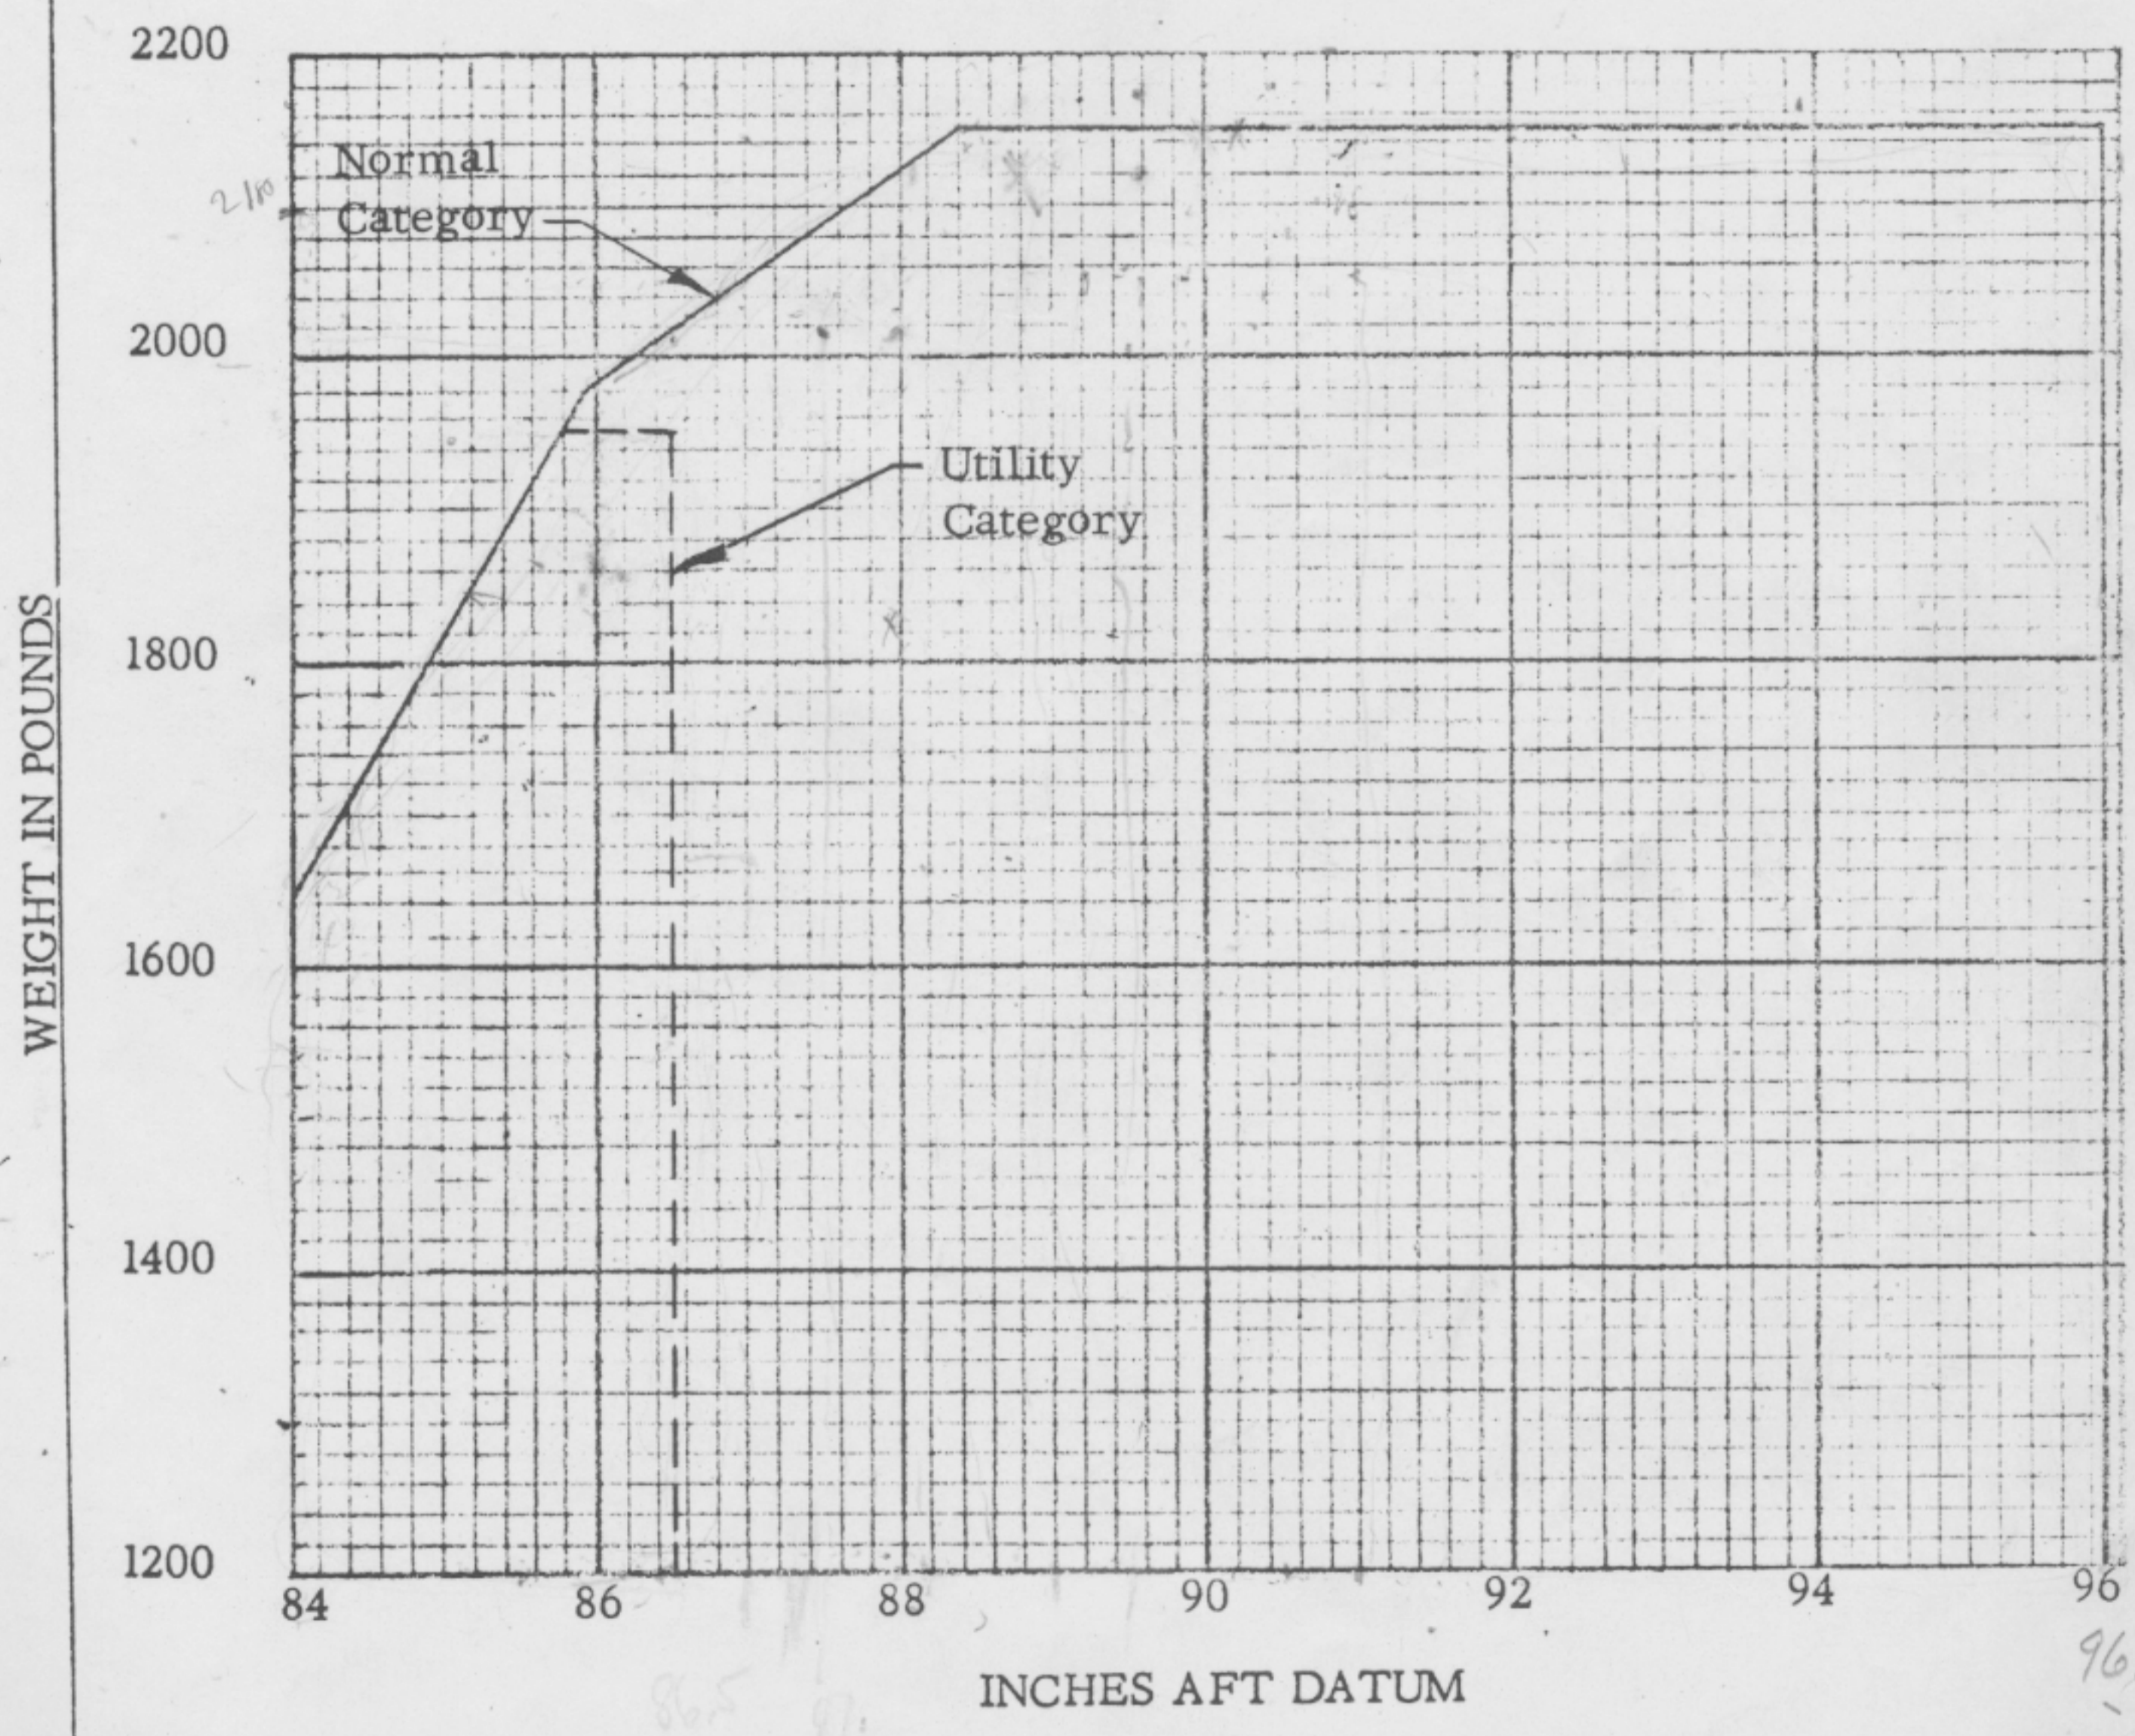

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED		PAGE 5 Section 1

WEIGHT AND BALANCE DATA

WEIGHING PROCEDURE

At the time of delivery, Piper Aircraft Corporation provides each airplane with the licensed empty weight and center of gravity location. This data is on Page 1, Section 1 of this Flight Manual.

The removal or addition of an excessive amount of equipment or excessive airplane modifications can affect the licensed empty weight and empty weight center of gravity. The following is a weighing procedure to determine this licensed empty weight and center of gravity location:

1. PREPARATION

- a. Be certain that all items checked in the airplane equipment list are installed in the proper location in the airplane.
- b. Remove excessive dirt, grease, moisture, foreign items such as rags and tools from the airplane before weighing.
- c. Defuel airplane. Open all fuel drains and operate engine until all unusable and undrainable fuel is used from each tank and engine stops.
- d. Drain all oil from the engine, by means of the oil drain, with the airplane in ground attitude. This will leave the undrainable oil still in the system. Engine oil temperature should be in the normal operating range.
- e. Place pilot and co-pilot seats in fourth (4th) notch, aft of forward position. Put flaps in the fully retracted position and all control surfaces in the neutral position. Tow bar should be in the proper location and all entrance and baggage doors closed.
- f. Weigh the airplane inside a closed building to prevent errors in scale readings due to wind.

2. LEVELING

- a. With airplane on scales, nose wheel strut exposure should be 3.50 inches and main gear fully extended.
- b. Level airplane (see diagram) by deflating nose wheel tire, to center bubble on level.

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED		PAGE 6 Section 1


3. WEIGHING - AIRPLANE EMPTY WEIGHT

- a. With the airplane level and brakes released, record the weight shown on each scale. Deduct the tare, if any, from each reading.

Scale Position and Symbol	Scale Reading	Tare	Net Weight
Nose Wheel (N)			
Right Main Wheel (R)			
Left Main Wheel (L)			
Airplane Empty Weight, as Weighed (T)			

4. EMPTY WEIGHT CENTER OF GRAVITY

- a. The following geometry applies to the PA-28-140 airplane when airplane is level (See Item 2).

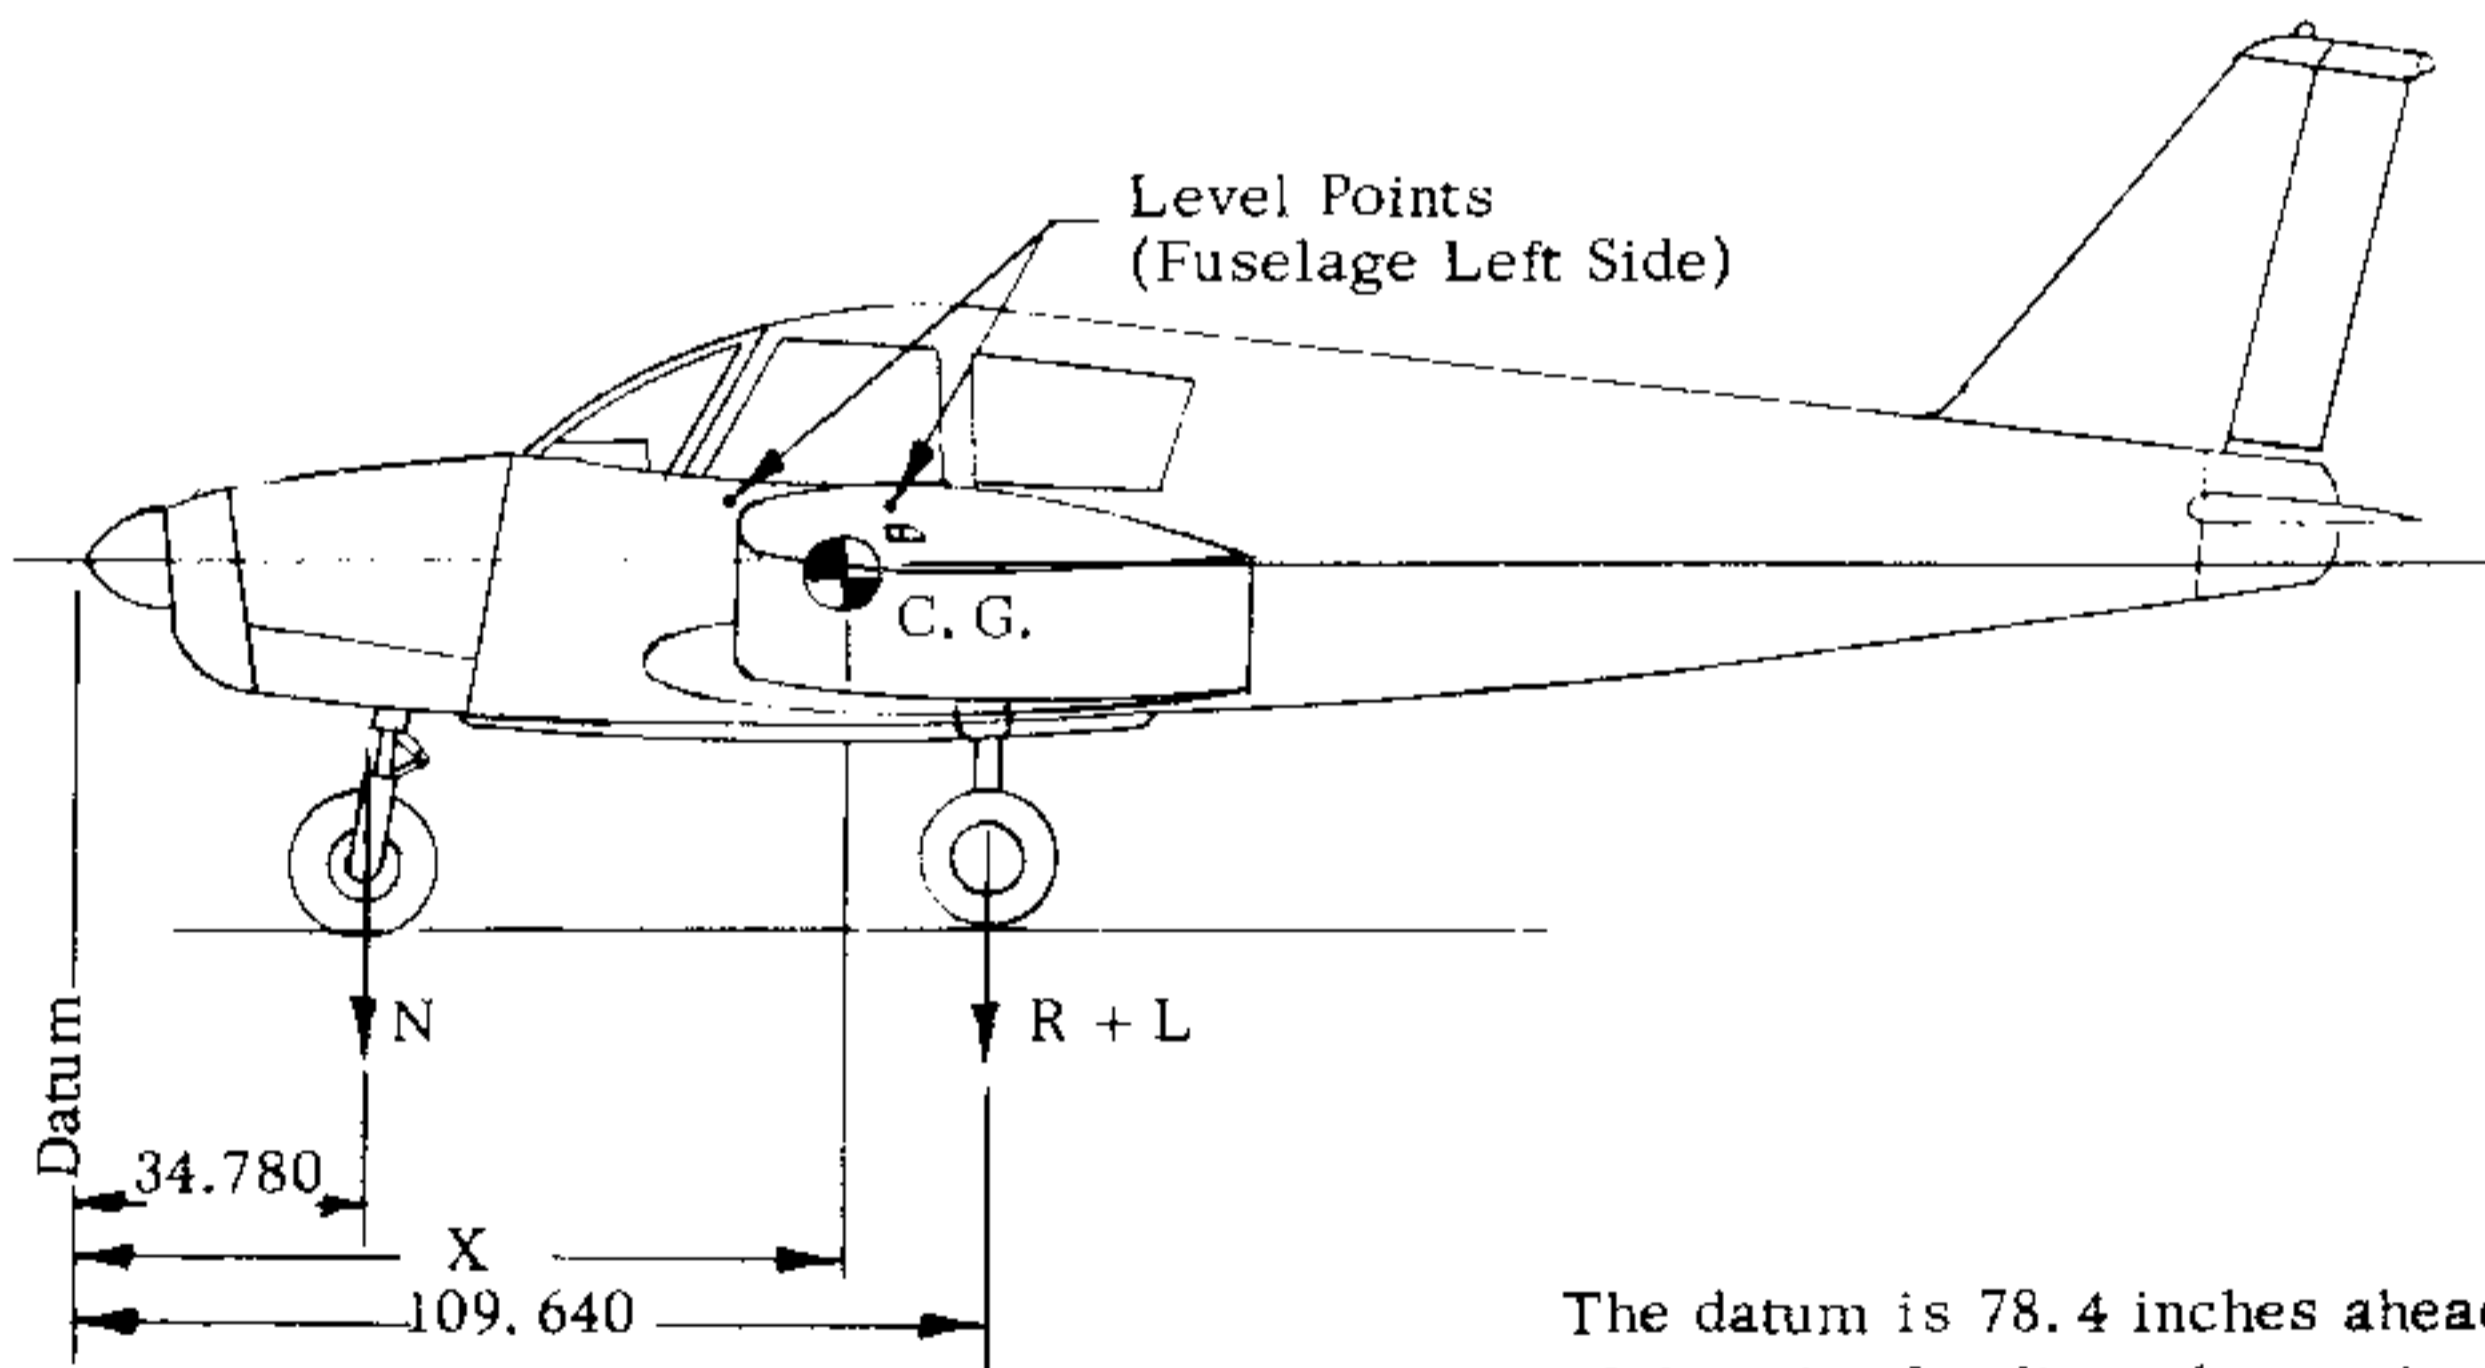

The datum is 78.4 inches ahead of the wing leading edge at the intersection of the straight and tapered section.

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED		PAGE 7 Section 1

b. The empty weight center of gravity (as weighed including optional equipment and undrainable oil) can be determined by the following formula:

$$\text{C.G. Arm} = X = \frac{(N)(34.780) + (R + L)(109.640)}{(T)}$$

$$X = \frac{( ) (34.780) + ( ) (109.640)}{( )} = \quad \text{inches} \\ \text{aft datum}$$

5. LICENSED EMPTY WEIGHT AND EMPTY WEIGHT CENTER OF GRAVITY

	Weight	Arm	Moment
Empty Weight (as weighed)			
Unusable Fuel (3 Pints)	2.2	103.0	227
Licensed Empty Weight			

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED	STANDARD EQUIPMENT LIST	PAGE 8 Section 1

WEIGHT AND BALANCE STANDARD EQUIPMENT LIST MODEL PA 28-140				
	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
Check if Installed	<u>Engine Accessories</u>			
<u>X</u>	Engine - Lycoming Model O-320-E2A	261.4	26.1	6822
<u>X</u>	Fuel Pump, Electric Auxiliary, Bendix Model 478360	1.8	41.8	75
<u>X</u>	Fuel Pump, Engine Driven, Lycoming Dwg. No. 73297, 74082, 75148 or 75246	1.6	41.3	66
<u>X</u>	Oil Cooler, Piper Dwg. Harrison #C-8526250	2.6	18.1	47
<u>X</u>	Filter, Fram Model CA-161PL or AC No. A48C or Purolator AFP-2	.9	20.1	18
	Starter - Lycoming #69952 (Delco Remy #1109657)	* 17.0	19.5	332
<u>X</u>	Starter - Lycoming #76210 (Prestolite MZ 4204)	* 17.0	19.5	332
<u>X</u>	Alternator, 35 Amp., Chrysler No. 2098615 or No. 2642996	12.5	19.0	238
	<u>Propeller and Propeller Accessories</u>			
<u>X</u>	Propeller, Sensenich M74DM58	30.0	10.1	303
<u>X</u>	Spinner and Attachment Plates	2.0	8.0	16
	<u>Landing Gear and Brakes</u>			
<u>X</u>	Two Main Wheel Assemblies 6.00-6 (a) Cleveland Aircraft Products (2) Wheel Assembly No. 40-86 (2) Brake Assembly No. 30-55 (b) Two Main 4-Ply Rating Tires 6.00-6 with Regular Tubes	32.0	109.6	3507
<u>X</u>	One Nose Wheel 6.00-6 (a) Cleveland Aircraft Products Wheel Assembly No. 38501 (less brake drum) (b) One Nose Wheel 4-Ply Rating Tire 6.00-6 with Regular Tubes	12.5	34.8	435

\*Included in Engine Weight

<b>PREPARED</b>	<b>PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.</b>	Weight and Balance Data Model PA-28-140
<b>CHECKED</b>		
<b>APPROVED</b>	STANDARD EQUIPMENT LIST	PAGE <u>9</u> Section <u>1</u>

Check if Installed	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
	<u>Electrical Equipment</u>			
<u>X</u>	Stall Warning Device, Safe Flight Instru- ment Corp., No. C52207-4	.2	80.2	16
<u>X</u>	Voltage Regulator, Chrysler No. 2098613	.5	57.8	29
	Battery 12V 25 A.H., Rebat Model S-25	21.5	114.9	2470
	<u>Instruments</u>			
<u>X</u>	Compass - Airpath No. C2350-L41	.9	66.6	60
	Airspeed Indicator, Piper Drawing 63205	.6	67.7	41
	Tachometer, AC1548302	.8	67.7	54
<u>X</u>	Tachometer, Stewart-Warner, PAC 62177	.7	67.7	47
	Altimeter, Aero Marine No. 522	1.4	66.8	94
<u>X</u>	Engine Cluster - Piper Drawing 63426	.8	68.8	55
	Engine Cluster - Piper Drawing 63922-2	.8	68.8	55
<u>X</u>	Altimeter, Macleod No. 12003 or 12003M	1.0	66.8	67
	<u>Miscellaneous</u>			
<u>X</u>	Forward Seat Belts (2)	1.5	86.9	130
<u>X</u>	Baggage Tie Down Straps	.8	118.0	94
<u>X</u>	Flight Manual	- - - -	- - - -	- - - -
<u>X</u>	Tow Bar	1.3	104.7	136

THE ABOVE ITEMS ARE INCLUDED IN THE AIRPLANE STANDARD EMPTY WEIGHT.



PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED	OPTIONAL EQUIPMENT LIST	PAGE 10 Section 1

OPTIONAL EQUIPMENT LIST

MODEL PA-28-140

Check if Installed	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
	<u>Engine Accessories</u>			
<u>X</u>	Vacuum Pump, Airborne Mechanisms Model No. 10-113A1 or 113A5 or 200 cc and Drive	5.0	37.0	185
	Starter-Lycoming 74092 (Delco Remy 1109511) (Weight 18.0 lbs.)	1.0 *	19.5	20
	Starter-Lycoming 76211 (Prestolite MZ 4206) (Weight 18.0 lbs.)	1.0 *	19.5	20
<u>X</u>	Oil Filter -Lycoming #74911 (AC 81-A #6437032)	3.3	40.5	134
<u>X</u>	Vacuum Regulator and Filter	2.2	57.0	125
	Vacuum Regulator	1.5	56.0	84
	<u>Electrical Equipment</u>			
<u>X</u>	Rotating Beacon, Grimes #40-0101-7-12 or Grimes #40-0101-15-12	1.5	263.4	395
<u>X</u>	Landing Light, G. E. Model 4509	.5	18.1	9
<u>X</u>	Navigation Lights (2) Grimes Model A1285 (Red and Green)	.4	106.6	43
<u>X</u>	Navigation Light (rear)(1) Grimes Model 2064 (White)	.2	281.0	56
<u>X</u>	Battery 12V., 35 A.H. Reading R-35 (Weight 27.0 lbs.)	5.5 *	114.9	632

\* Weight and Moment difference between standard and optional equipment.

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED	OPTIONAL EQUIPMENT LIST	PAGE 11 Section 1

Check if Installed	ITEM	WEIGHT (LBS)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
	<u>Electrical Equipment (Cont'd)</u>			
	Roll Servo Mitchell 1X221E-CH-1	2.8	60.6	170
	Console Amplifier and Cables, Mitchell 1X214E	1.8	66.6	120
X	Dome Light	.3	104.0	31
X	Speaker	.8	104.0	83
	Rotating Beacon, Whelen Model WRML-12	1.6	263.4	421
	Auxiliary Power Receptacle 65529	1.3	153.0	199
	Diode	2.0	111.5	223
	External Power Cable 62355-7	4.6	117.0	538
	Piper Auto Control-Mitchell #AKO85	4.5	60.0	270
	Piper Pitch Trim	4.0	158.0	632
	Heated Pitot Head	.4	100.0	40
	<u>Instruments</u>			
	Turn and Bank, Pioneer A-5	1.5	66.4	100
	Suction Gauge, AN5771-11	.5	68.1	34
	Suction Gauge, U. S. Gauge AW1821AFO3	.5	68.1	34
X	Suction Gauge, Airborne Mechanisms 1G3-4	.5	68.1	34
	Rate of Climb, Standard Precision SP-1403- (1)-PIP	.5	66.8	33

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED	OPTIONAL EQUIPMENT LIST	PAGE 12 Section 1

Check if Installed	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
	<u>Instruments</u> (Cont'd)			
	Altimeter, AN5760-2 (C-12 or C-13)	Same as Standard Equipment Weight		
	Rate of Climb, Pioneer C-7	1.0	66.8	67
	Rate of Climb, AN5825	1.0	66.8	67
	Artificial Horizon, Jack & Heintz	2.8	66.1	185
	Artificial Horizon, Garwin (3")	1.8	65.8	118
	Artificial Horizon, AIM (3")	2.2	65.3	144
	Directional Gyro, Jack & Heintz	2.6	66.6	173
	Directional Gyro, Sperry	3.9	66.6	260
	Directional Gyro, Garwin (3")	2.4	65.6	157
	Directional Gyro, AIM (3")	3.1	64.9	201
X	Air Temperature Gauge, Rochester Manufacturing Co., No. 1592-C2 or NHM-70(Manning, Maxwell & Moore)	.2	82.6	17
X	Clock, 8-Day - MIL-C-7939	.4	68.3	27
	Piper Course Selector, PAC 31058	3.0	66.6	200
X	Tru-Speed Indicator, PAC 62143	Same as Standard Equipment Weight		
X	Rate of Climb, Karnish AC 135-3	1.0	66.8	67
X	Pictorial Rate of Turn, Mitchell 52D69	1.3	66.2	86
	Turn and Bank, Electric	2.2	65.8	145
	Brittain Turn Coordinator #TC-100(12)	2.6	65.6	171
X	Artificial Horizon, R. C. Allen (3")	2.2	66.6	147
X	Directional Gyro, R. C. Allen (3")	3.3	65.7	217

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model FA-28-140
CHECKED		
APPROVED	OPTIONAL EQUIPMENT LIST	PAGE 13 Section 1

	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
Check if Installed	<u>AutoPilots</u>			
	AutoControl II			
	Roll Servo, Mitchell #1X221E-CH-1	2.8	60.6	170
	Console, Mitchell #1X224E-3	1.3	66.6	87
	Directional Gyro, Mitchell #52B15E or Directional Gyro, Course Selector PAC Drawing 31058-2	4.3	66.6	286
	Artificial Horizon, Mitchell #52B9	3.0	66.6	200
	Artificial Horizon, Mitchell #52B9	4.5	66.1	298
	<u>Auto Flite</u>			
	Roll Servo, Mitchell #1D363-153	2.6	122.2	318
	Gyro Amplifier, Mitchell #1C359	1.8	111.8	201
	Cables	1.0	95.5	96
	Panel Unit	.3	68.8	21
	<u>Radio</u>			
	Piper Radio Compass PRC-3	4.5	64.4	290
	Piper VHF Transceiver PTR-1	5.0	64.8	324
	Piper Omni Convertor O-1	2.5	65.3	163

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED	OPTIONAL EQUIPMENT LIST	PAGE 14 Section 1

Check if Installed	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
	<u>Radio</u> (Cont'd)			
	King KX150B	9.1	62.8	572
X	Omni Receiving Antenna, Narco VRP-37	1.4	203.0	284
X	VHF Transmitting Antenna, Narco VTP-17-VHIF-1 (Includes Cable)	.7	135.0	95
	Low Frequency Antenna	.5	167.0	84
	Loop Antenna (PRC-3)	.3	54.5	16
X	Narco Mark 12			
X	Transceiver	6.0	62.8	377
X	Modulator - Power Unit	4.0	56.0	224
X	Cable	.3	58.0	17
	Narco VOA-6 Omni Convertor	1.8	65.3	118
	Narco VOA-5 Omni Convertor	3.1	65.3	202
	Narco VOA-4 Omni Convertor	3.0	65.3	196
	Narco Omnigator VTR-2A Installation (Less Antenna)	14.0	58.0	812
	Marker Antenna	1.2	64.8	78
	Narco Mark III	7.5	63.6	477
	Piper Radio Compass PRC-4	4.9	64.4	316
	Loop Antenna (PRC-4)	.4	112.6	45
	Piper Omni Convertor OL-1	2.8	65.3	183
	VHF Transmitting Antenna, Narco VTP-17-VHF-2 (Includes Cable)	.8	156.6	125

	<u>ITEM</u>	<u>WEIGHT (LBS)</u>	<u>ARM AFT DATUM (INCHES)</u>	<u>MOMENT (POUND- INCHES)</u>
Check if Installed	<u>Radio</u> (Cont'd)			
	Bendix ADF-T-12			
	Receiver	3.8	64.9	247
	Audio Amplifier	.8	64.9	52
	Radio Compass	1.7	67.3	114
	Loop Antenna	1.2	160.8	193
	Cable, Antenna	1.5	108.0	162
X	Microphone	.5	66.0	33
X	Headset	.5	66.0	33
	Narco ADF-31A, Piper Drawing 65602			
	Panel Unit	4.8	64.4	309
	Sensor Unit and Doublers	2.2	162.7	358
	Sensor Cable	2.3	105.6	243
	Sense Antenna and Cable	.4	150.0	60
	Omni Tracker (#1D482)	.5	64.5	32
X	Narco VOA-8 Omni Convertor	3.3	65.3	215
	Narco VOA-9 Omni Convertor	3.4	65.3	222
	<u>Miscellaneous</u>			
	Fire Extinguisher - Stop Fire #A-20	7.5	93.0	698
X	Nose Wheel Fairing, Piper Dwg. 65348	3.8	34.8	132
X	Main Wheel Fairings, Piper Dwg. 65237	7.0	109.6	767
	Toe Brakes (Dual)	10.5	54.6	574
X	Toe Brakes (Single)	5.0	54.6	273
	Fire Extinguisher, Kidde Kompact VI (With Brackets)	5.3	85.0	451

PREPARED	PIPER AIRCRAFT CORP. DEVELOPMENT CENTER, VERO BEACH, FLA.	Weight and Balance Data Model PA-28-140
CHECKED		
APPROVED	OPTIONAL EQUIPMENT LIST	PAGE 16 Section 1

Check if Installed	ITEM	WEIGHT (LBS.)	ARM AFT DATUM (INCHES)	MOMENT (POUND- INCHES)
	<u>Miscellaneous</u> (Cont'd)			
X	Assist Step	1.8	156.0	281
X	Jump Seat (2) Piper Drawing 65500	16.2	118.0	1912
	Inertia Safety Belt, PAC 65766 (Set of 2)	2.5	111.6	279
X	Jump Seat Belts and Cables	1.1 *	123.0	135
X	Assist Strap and Coat Hooks	.2	109.5	22
X	Lighter	.2	68.8	14
	TOTAL OPTIONAL EQUIPMENT	80.6	88.1	7102

EXTERIOR FINISH

Base Color Juneau White

1st Trim Color Beaumont Blue

2nd Trim Color \_\_\_\_\_

Registration No. Color Beaumont Blue

Type Finish Lacquer

\* Weight and moment difference between standard and optional equipment.